



2 LEADING GROUP







35+Years of experience in delivering Quality












MATRIX WHITE









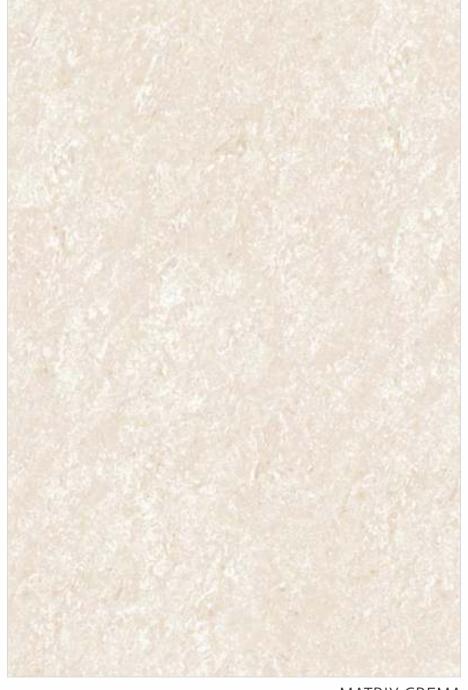


MATRIX CREMA









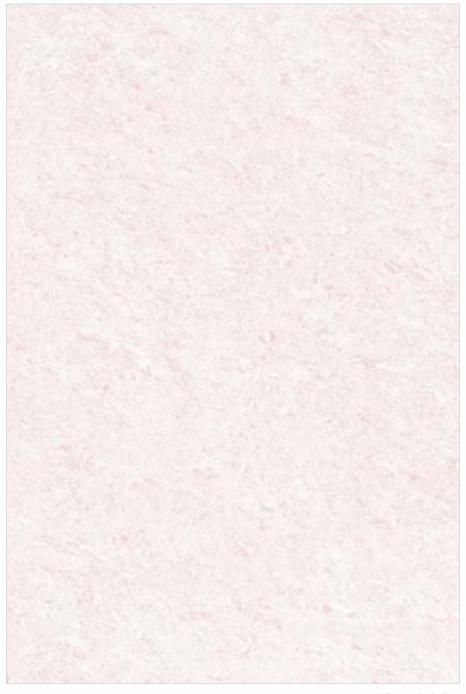


MATRIX ROSA









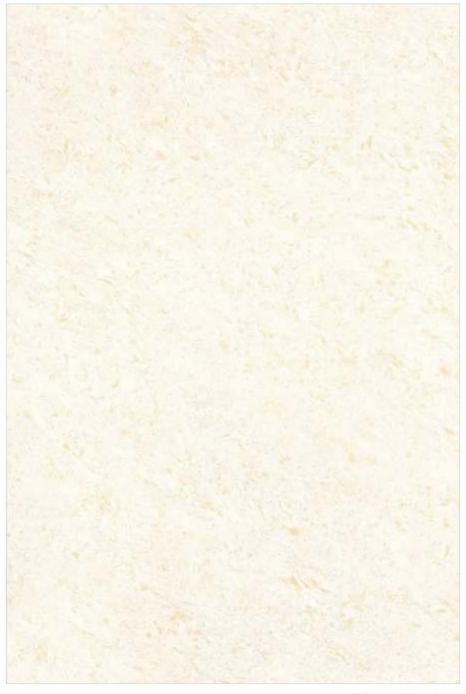


MATRIX YELLOW









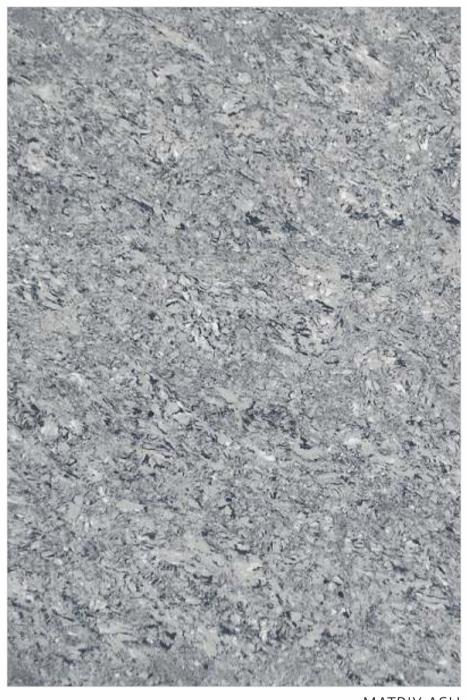

MATRIX ASH












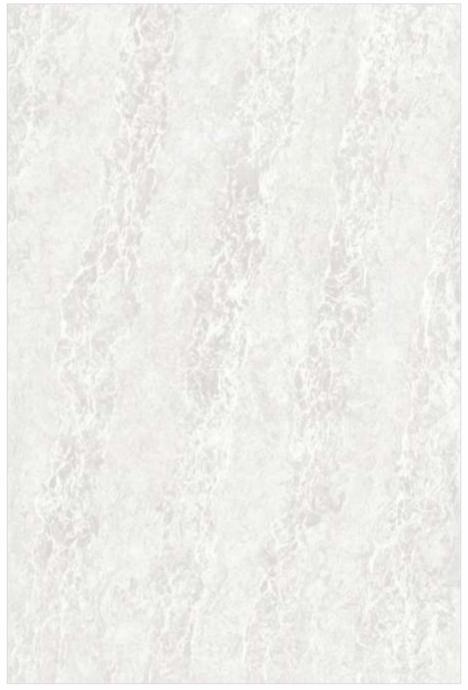


OMNIA WHITE









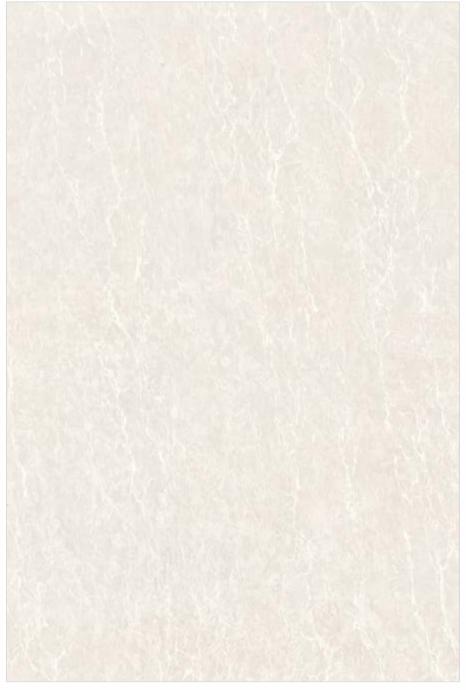

OMNIA CREMA












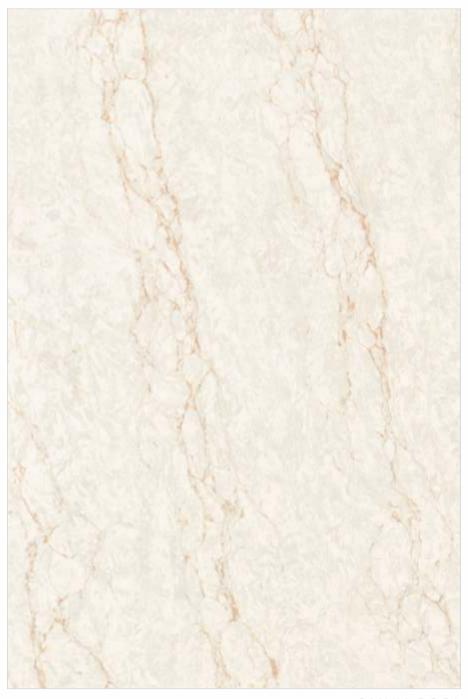

OMNIA ROSA













OMNIA YELLOW











OMNIA SNOW WHITE











DYNA WHITE










DYNA CREMA







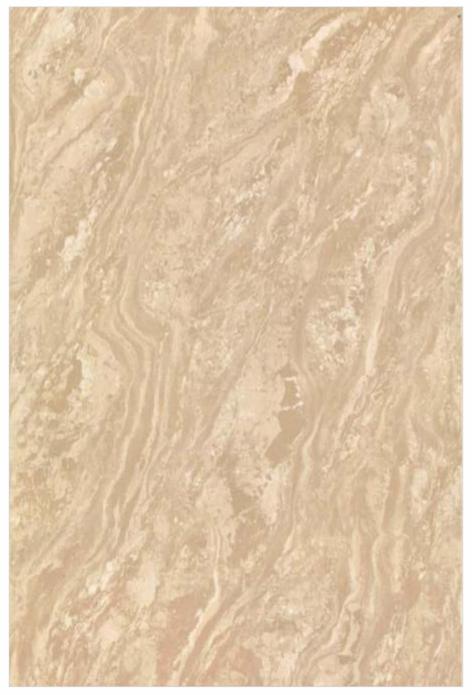

DYNA GOLD









DYNA YELLOW









DYNA SNOW WHITE











DYNA ASH









DYNA BROWN













AZZURO WHITE













AZZURO CREMA









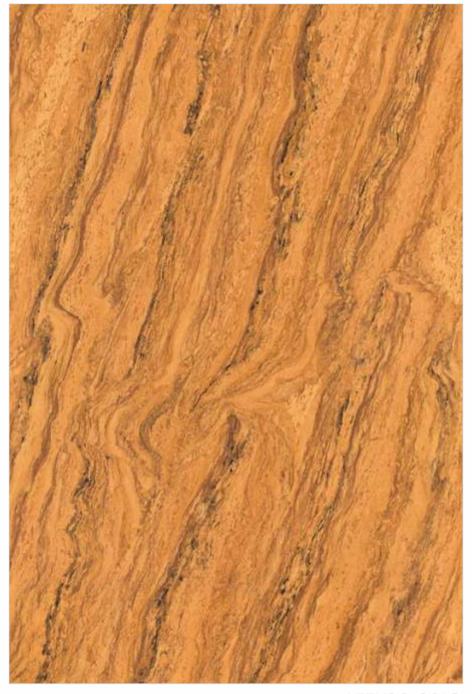


AZZURO GOLD












AZZURO YELLOW












AZZURO SNOW WHITE









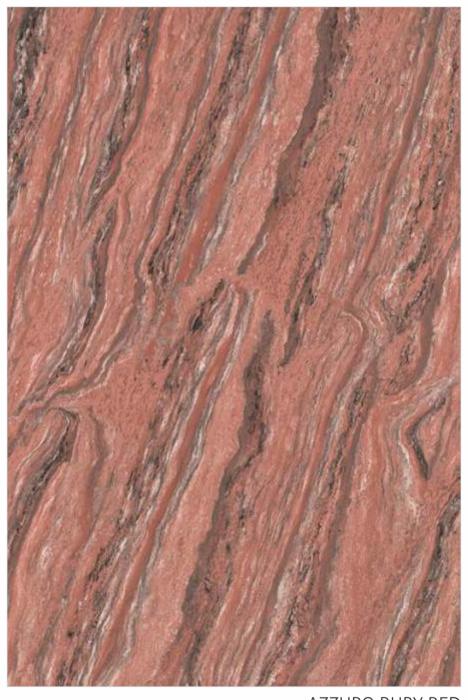

AZZURO RUBY RED












CARRARA WHITE









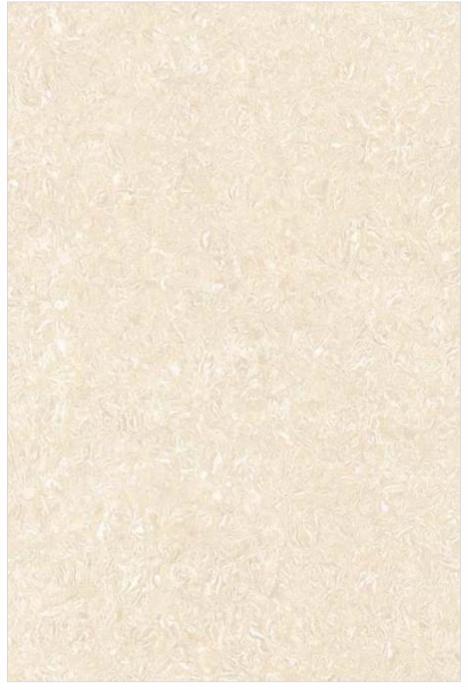


CARRARA YELLOW







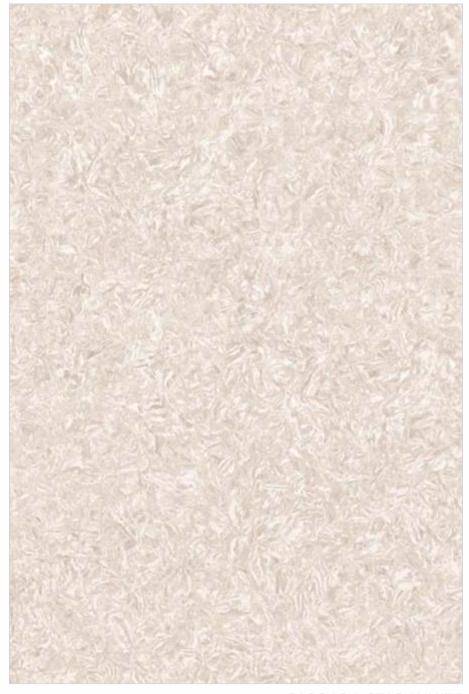

CARRARA STAR WHITE











CARRARA ASH











CARARA GREY



Sr. No.	PROPERTY	International Std. ISO 13006/EN 176 Group Bla	Keravit Double Charge Vitrified Tiles Value	Method of Testing
1.	Deviation in Length	±0.6%	±0.1%	EN 98
2.	Deviation in Thickness	±0.5%	±0.1%	EN 98
3.	Straightness of Sides	±0.5%	±0.3%	EN 98
4.	Rectangularity	±0.6%	±0.3%	EN 98
5.	Surface Flatness	±0.5%	±0.2%	EN 98
6.	Water absorption *	<0.5%	<0.03%	EN 99
7.	Mohs hardness *	> 6	> 6	EN 101
8.	Flexural Strength *	> 27 N/mm²	> 40 N/mm²	EN 100
9.	Abrasion resistance	< 204 mm³	< 144 mm³	EN 102
10.	Skid Resistance (Friction Coefficient)	> 0.4	> 0.6	ASTM C-1028
11.	Breaking Strength *	1113 N	2500 N	ASTM C-648
12.	Density (g/cc)	> 2	2.4	DIN 51082
13.	Frost resistance	Frost proof	Frost proof	EN 202
14.	Chemical Resistance	No damage	No damage	EN 106
15.	Thermal Shock Resistance	No damage	No damage	EN 104
16.	Colour Resistance	No damage	No damage	DIN 51094
17.	Thermal Expansion	< 9 x 10-6	< 6 x 10-6	EN 103
18.	Stain Resistance	Resistant	Resistant	ISO 10545-14
19.	Moisture Expansion	Nil	Nil	ISO 10545-10
20.	Glossiness	_	89% reflection	Glossmeter

Product Specification

Şize	No. Of Tiles Per Box	Coberage Area
800x1200mm	2 Acs	1.92 Sq. Mtr.
800x800mm	3 Acs	1.92 ≶q. Mtr.

DOUBLE CHARGE 800 X 800mm 800 X 1200mm





KERA VITRIFIED LLP

At.Nichi Mandal, Morbi - Halvad Main Road Morbi - 363642, Gujarat - India sales@keravitrified.com www.keravitrified.com +91 990 900 7172